


Included in the Box:

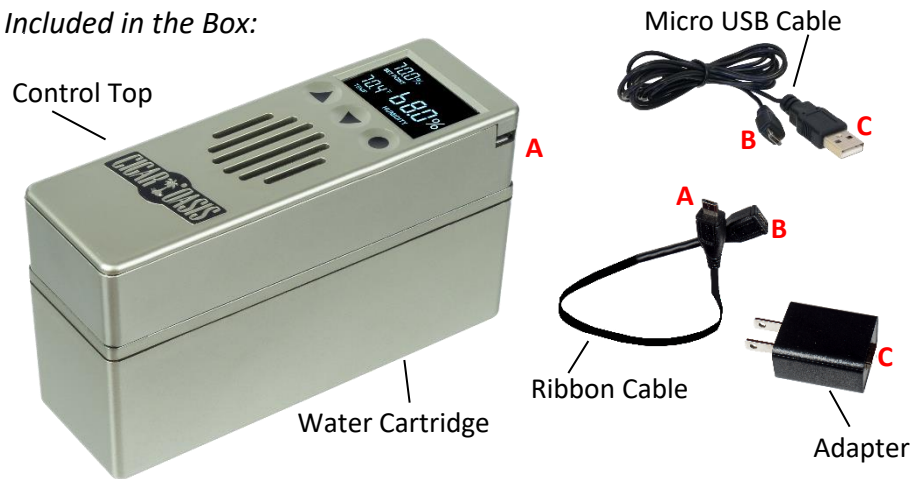

- 4) Connect the ribbon cable **A** to the port on the **EXCEL 3.0** unit **A**. The flat part of the ribbon cable will slide out the side of the humidor or through the hinges at either corner.
- 5) Connect the Ribbon Cable **B** to the Micro USB cable **B**.
- 6) Then connect **C** to the Adapter **C** and plug into an outlet.

## ASSEMBLY & STARTING YOUR CIGAR OASIS EXCEL 3.0

Remove all contents from the box and remove all plastic wrap.



### Water Cartridge Fill Instructions

- 1) Fill a bowl with **distilled water only** and submerge the cartridge in it for 4 minutes or pour water in holes, wait for water to absorb and repeat until it stops absorbing.
- 2) After completely filling, let it stand for another minute.
- 3) Empty all remaining water out of the cartridge so only damp foam remains. **\*\*No water should drip out when the cartridge is held upside down\*\*.**
- 4) Dry off the cartridge and put the unit together.

### Set Up Instructions

- 1) Place the cartridge on a table with the Cigar Oasis sticker facing you.
- 2) Place the control top with the screen on the left side on top of the cartridge while aligning the notches on both pieces.
- 3) Hold the cartridge in place while sliding the control top left (push from the logo side) until it locks into place.

## USING YOUR CIGAR OASIS EXCEL 3.0

- Once the unit is put together and plugged in, it turns on after a few seconds of powering up and then it will read the current humidity. The unit is factory preset at 70% humidity. As soon as the humidity drops below 70% the fan will come on to add moisture to the humidor.
- To raise or lower the humidity settings use the **UP** or **DOWN** arrows.
- When the unit needs to be refilled with distilled water, the **Low Water** and **Alert** icons will flash on display.  
- When the cartridge is refilled and the unit gets to the setpoint the icons will shut off.

### To Change Temperature Between Fahrenheit and Celsius

- 1) Hold the **CIRCLE** button until the **F** or **C** start flashing.
- 2) Press the **UP** arrow to select Celsius or Fahrenheit.
- 3) Hold the **CIRCLE** button down until **F** or **C** stop flashing to save the changes.

### To Calibrate the Humidity

- 1) Hold the **CIRCLE** and **UP** arrow until the screen displays **U**.
- 2) Use **UP** and **DOWN** arrows to raise or lower humidity  $\pm 9\%$ .
- 3) Hold the **CIRCLE** and **UP** arrow to save the changes.



For warranty information go to [www.cigaroasis.com](http://www.cigaroasis.com)



79 Heisser Court  
Farmingdale, NY 11735  
516.520.5258  
[www.cigaroasis.com](http://www.cigaroasis.com)

*Cigar Oasis...the best in cigar humidification just got even better!*